

## Description

Lexan HPXXW graphic film is a high-performance coated film offering very good chemical/abrasion resistance, plus very good UV resistance. These performance capabilities, along with Lexan film's ease of processing, make HPXXW film a good choice for outdoor graphic applications such as: Warning Labels, Outdoor Menu Boards, Gasoline Pumps, Outdoor Lenses, and Marine Graphics.

## Typical property Values ♦

Property	ASTM (ISO) Test Method	Units USCS (SI)	HP12W	HP92W
<b>Mechanical</b>				
Tensile Strength				
@ Yield	ASTM D882 (ISO 527)	psi (MPa)	8800 (60)	8800 (60)
Ultimate	ASTM D882 (ISO 527)	psi (MPa)	9000 (62)	9000 (62)
Tear Strength				
Initiation	ASTM D1004	lb/mil (kN/m)	1.51 (264)	1.51 (264)
Propogation	ASTM D1922	g/mil (kN/m)	40 (14)	40 (14)
<b>Thermal</b>				
Vicat Softening Temperature, B	ASTM 1525	°F (°C)	320 (160)	320 (160)
Heat Deflection Temp. by TMA at 1.8 Mpa	ISO 75 Modified	°F (°C)	290 (145)	291 (145)
Shrinkage at 302°F (150°C)	ASTM D1204	%	1.40%	1.40%
<b>Physical</b>				
Density	ASTM D792 (ISO 1183)	slug/ft <sup>3</sup> (kg/m <sup>3</sup> )	2.3 (1200)	2.3 (1200)
Surface Energy (1st surface / 2 <sup>nd</sup> surface)	ASTM D5946-01	-	NA/34	NA/34
Surface Tension (1st surface / 2 <sup>nd</sup> surface)	Dyne Pen <sub>0.020"</sub> (0.500 mm)	Dyne	NA/38-40	NA/38-40
Pencil Hardness (coated surface)	ASTM D3363	-	bh-f	Hb-f
Taber Abrasion	ASTM D1044	delta Haze	<1	<2
<b>Optical</b>				
Refractive Index @77°F (25°C)	ASTM D542A	No	1.5	1.5
Light Transmission	ASTM D1003	%	90	92
Yellowness Index	ASTM D1925	%	1.3	0.7
Haze	ASTM D1003	%	56	0.5
Gloss over Flat Black min/max @ 60	ASTM D523-60 (ISO 2813)	-	12	92
UV% Transmission at 380 nm	UV/Visual Spectroscopy	%	14	39

## Manufacturing Specifications

### HP12W

Nominal Gauge Ranges	Min./Max Limit of Nominal
0.007" (0.175mm)	- 10%/ +24%
0.010 " (0.250 mm)	- 5%/+20%
0.015" (0.375 mm)	- 5%/+9%
0.020" (0.500 mm)	-3%/+6%
0.025" (0.625 mm)	-3%/+10%

### HP92W

Nominal Gauge Ranges	Min./Max Limit of Nominal
0.007" (0.175mm)	- 10%/ +24%
0.010 " (0.250 mm)	- 5%/+20%
0.015" (0.375 mm)	- 5%/+12 %
0.020" (0.500 mm)	- 5%/+10 %

- ♦ These are typical properties and are not intended for specification purposes. If minimum certifiable properties are required, please contact your local SABIC Innovative Plastics representative or the SABIC Innovative Plastics' Quality Services Department. Reported Values are Based on 0.010" (0.250 mm) Thickness unless otherwise noted.

\* Trademark of SABIC Innovative Plastics IP BV

## Lexan\* HPXXW Film


## Product Datasheet

### UV Resistance

Lexan HPXXW film utilizes a proprietary coating technology developed by SABIC Innovative Plastics. This special coating resists yellowing and hazing – no matter how bright the sun. With a yellowness index of less than 3.0 at 1000 hours of QUV testing and less than 2.0 at 1000 hours of Xenon Arc testing. Lexan HPXXW film is a natural choice for demanding outdoor applications.

### Masking

The standard masking on HP film is not designed to have UV radiation (for curing) passed through it. If this is required, alternate masking is available. Please contact your sales representative for more details.

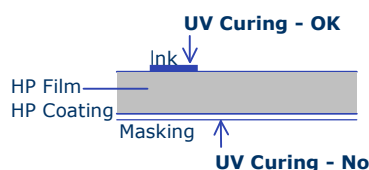

### Chemical and Abrasion resistance

Along with very good UV resistance, Lexan HPXXW film also has chemical and abrasion resistance comparable with the original HPS series of films.

### Chemical Resistance

Chemical	Results <sup>†</sup>
<b>One hour continuous Surface Contact at 73 °F</b>	
Acetone	Failed <sup>††</sup>
MEK	Failed @ <50 min. <sup>††</sup> (HP92W) Passed (HP12W)
Toluene	Passed
Methylene Chloride	Failed <sup>††</sup>
Isopropyl Alcohol	Passed
Cyclohexanone	Passed
Ethyl Acetate	Passed
Xylene	Passed
40% NaOH	Passed
Concentrated HCl	Passed
Gasoline (Regular)	Passed
Gasoline (Unleaded)	Passed
Butyl Cellosolve	Passed
<b>24 Hour Surface Exposure at 120 °F</b>	
Coffee	Passed
Top Job <sup>‡</sup>	Passed
Fantastik <sup>##</sup>	Passed
Formula 409 <sup>#</sup>	Passed
Windex w/ Ammonia D <sup>###</sup>	Passed
Wisk <sup>¶</sup>	Passed
Downy <sup>#</sup>	Passed
Spray N Wash <sup>##</sup>	Passed
Clorox <sup>*</sup>	Passed
Mustard	Passed
Mr. Clean <sup>#</sup>	Passed
Ketchup	Passed
Tea	Passed
Tomato Juice	Passed
Lemon Juice	Passed
Grape Juice	Passed
Vinegar	Passed
Milk	Passed

<sup>†</sup> As manufactured. Results do not change after film post-cured.

<sup>††</sup> Failure constitutes any of the following: non-removable stain or cloudiness, blistering, delamination, or cracking of the coating or failure to pass crosshatch tape adhesion.

<sup>¶</sup> Wisk is a registered trademark of Lever Brothers Company

<sup>#</sup> Formula 409 and Clorox are registered trademarks of the Clorox Company

<sup>#</sup> Top Job, Downy, and Mr. Clean are registered trademarks of Procter & Gamble

<sup>##</sup> Fantastik and Spray 'N Wash are registered trademarks of Texize, Division of Norton Norwich Products, Inc.

<sup>###</sup> Windex w/Ammonia D is a registered trademark of Drackett Products Company

### TABER ABRASION RESISTANCE (ASTM D1044) LEXAN HPXXW Graphic Film

Condition	Units	HP12W	HP92W
CS10F Wheel, 500 Grams			
25	Change in % Haze	0.4	2
50	Change in % Haze	0.6	2.9
100	Change in % Haze	2	6.6
200	Change in % Haze	6.7	13.8



\* Trademark of SABIC Innovative Plastics IP BV

Americas:  
SABIC Innovative Plastics  
Specialty Film & Sheet  
One Plastics Avenue  
Pittsfield, MA 01201  
USA  
Tel. (1) (413) 448 5400  
Fax. (1) (413) 448 7506  
Toll free: 1-800 451 3147

Europe:  
SABIC Innovative Plastics  
Specialty Film & Sheet  
Plasticslaan 1  
NL - 4612 PX Bergen op Zoom  
The Netherlands  
Tel. (31) (164) 292911  
Fax. (31) (164) 293272

Pacific:  
SABIC Innovative Plastics  
Specialty Film & Sheet  
1266 Nanjin Road (W)  
Plaza 66, 17<sup>th</sup> Floor  
200040 Shanghai, China  
Tel. (86) 21 62881088  
Fax. (86) 21 62880818

THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of Sabic Holding Europe BV

\* Trademark of SABIC Innovative Plastics IP BV